


ULC DESIGN No. Z608
Rating -- 3 h

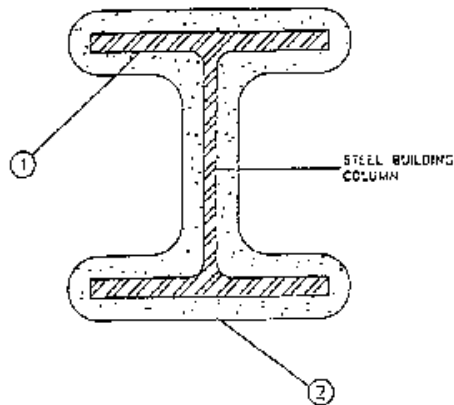

1. **Steel Column**- Minimum Size W310 x 253 W-shaped column with $M/D \geq 130$.
- 2. **Thin-Film Intumescent Coating** - (Guide No. 40 U18.12.9). Intumescent coating designated "A/D FIREFILM II" or "A/D FIREFILM III" applied in accordance with manufacturer's instructions to the minimum dry film thickness of 3.30 mm.

A/D FIRE PROTECTION SYSTEMS

3. **Finish Coating** silicone alkyd paint designated "A/D COLORCOAT".