


## ULC SYSTEM No. HW52

F Rating	- 2 h
FT Rating	- 1-1/2 h
FH and FTH Ratings	- 0 h

Joint Width – 50 mm Maximum  
Movement Capabilities – 25% Compression and Extension

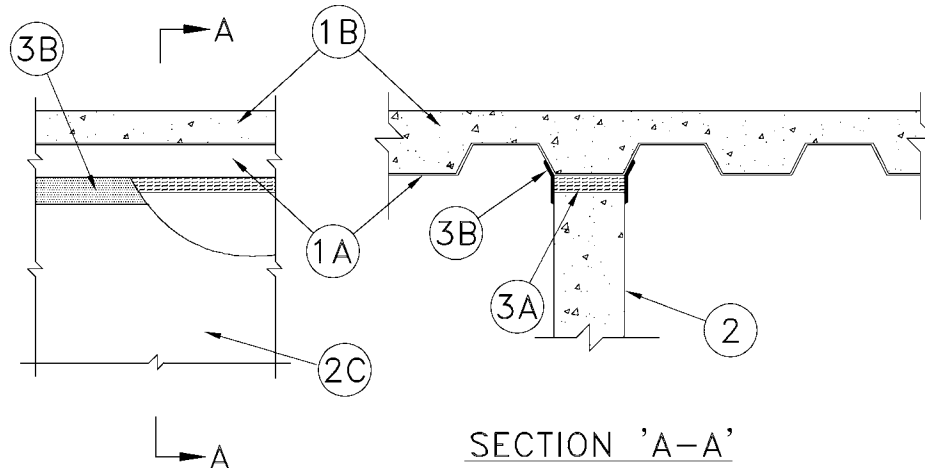

**1. Floor Assembly** – The fire-rated fluted steel deck/concrete floor assembly shall be constructed of the materials and in the manner described in the individual Floor-Ceiling design in the ULC List of Equipment and Materials, and shall include the following construction features:

(a) **Steel Floor and Form Units** – Maximum 76 mm deep galvanized steel fluted units.

(b) **Concrete** – Minimum 64 mm thick reinforced concrete as measured from the top plane of the floor units.

**1A. Roof Assembly** (not shown) - As an alternate to the floor assembly, a fire-rated fluted steel deck roof assembly may be used. The roof assembly shall be constructed of the materials and in the manner described in the individual R900 Roof and Ceiling Assemblies in the ULC List of Equipment and Materials, Fire Resistance. The roof assembly shall include the following construction features:

(a) **Steel Roof Deck** – Maximum 76 mm deep galvanized steel fluted roof deck.

(b) **Roof Insulation** – Minimum 63 mm thick poured insulating concrete, as measured from the top plane of the roof deck.

**The hourly rating of the floor or roof assembly shall be equal to or greater than the hourly rating of the wall assembly.**

**2. Wall Assembly** – Minimum 150 mm thick reinforced low-density or medium-density (1600 to 2400 kg/m<sup>3</sup>) structural concrete. Wall may also be constructed of nominal 200 mm thick concrete block

**3. Joint System** – Maximum separation between bottom of floor and top of wall is 50 mm. The joint system is designed to accommodate a maximum 25% compression or extension from its installed width. The joint system consists of forming material and a firestop material as follows:

(a) **Batts and Blankets** – Minimum 64 kg/m<sup>3</sup> density ULC labelled mineral wool batt are to be cut to 150 mm wide sections and compressed 50 percent in thickness and installed cut edge first to fill the maximum 50 mm gap between the top of the concrete wall and the underside of deck. The mineral wool insulation shall be installed flush with each side of the wall.

• (b) **Firestop System Component** – (Guide No. 40 U19.13). Minimum 3.2 mm wet thickness of A/D FIREBARRIER Seal N/S sprayed or brushed applied to cover the forming material on each side of the wall. The material shall be installed to overlap a minimum of 13 mm onto concrete wall and steel deck on both sides of wall.

A/D FIRE PROTECTION SYSTEMS INC.

January 29, 2003