

AD FIREBARRIER SILICONE Self Leveling (SL)

SELF LEVELING MEANS GREAT LABOR SAVINGS



THE BEST MULTI-PURPOSE SEALANT FOR FLOOR APPLICATIONS (NO TOOLING REQUIRED)

Used in penetrations made by Plumbing, Electrical, Mechanical, HVAC & Sprinkler Contractors

Used in joints by Pre-cast, and Curtainwall contractors

Typical applications: metal pipe, cables, conduit, insulated pipe, and HVAC duct penetrations, floor to wall, floor to floor & curtainwall joints

Silicone provides excellent movement capability & tools easily

Neutral cure, odorless application


Water will not affect silicone, even immediately after application

Ideal for cold weather applications, workable to 0 deg. F or (- 18 deg. C)

Highly elastomeric

Up to 3 HR ratings with up to 24" pipe & cable tray openings up to 2 sq. ft

UL, ULC, ITS, FM classified. Tested in accordance with ASTM E814, UL 1479, ULC - S115 & UL 2079

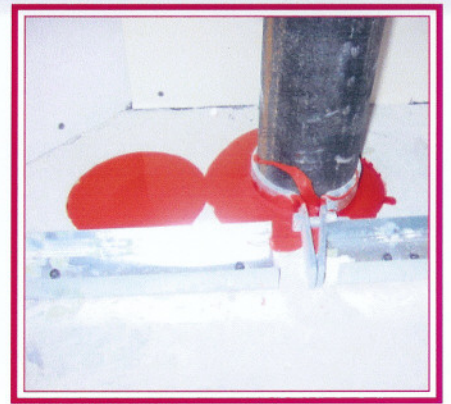

ORDERING INFORMATION

AVAILABLE IN:

PART NUMBERS:

10 oz tube
20 oz sausage
28 oz tube
2.63 gal pail
4.5 gal pail

ADSLV10
ADSLV20
ADSLV28
ADSLV2G
ADSLV5G